XR1055-B

B CLASS CARRIAGE — HIGH PIVOT ROLLER BOOM

SPECIFICATIONS

Lift capacity	10,000 lbs
Max lift height	55'
Forward reach	39'
Frame leveling L/R	11°
Weight*	34,600 lbs
Engine (Cummins)	3.8L 74/120hp – T4F
Axles	ZF MST3055 / 3060
Transmission	ZF 3WG94
Fuel capacity	50 gal
Tires	15.5 x 25 G2 foam-filled
Hydraulic flow (gpm)	49 gal
Hydraulic pressure	3,500 psi
Hydraulic oil capacity	62 gal
Length to fork face	21' 4"
Width	101"
Height	8' 8"
Wheelbase	125"
Ground clearance	16.5"
Turning radius	12'

*Weight based on open cab model with foam-filled tires.

STANDARD FEATURES

- 360° operator visibility
- Suspension seat
- Easy service access
- Protected tilt & extend cylinders
- Steel hydraulic & fuel tank
- Long life Lexan labels
- Heavy-duty boom chains
- Suspended pedals
- Large-capacity fuel tank
- Trunnion-mounted sway cylinders
- Melonite pins
- Standard auxiliary hydraulics
- Steel dash
- Long-life boom rollers
- Electrical aux hydraulic control
- Center-mounted powertrain
- Cab step
- Ductile steel manifold
- Easy cab-mounted grab handles
- Master disconnect switch
- Boom lift point
- Manual lowering valve (cylinders)
- Large cross section boom
- Easy tie-downs
- Heavy-duty pre-cleaner
- Additional high-pressure hydraulic filter
- Individual gauges/switches
- Steel hood
- Solid steel plate chassis
- Rear axle stabilization (RAS)
- Backup alarm with light
- Dual batteries
- Limited-slip front axle
- Engine block heater

LOAD CAPACITY CHART

Rear axle must be locked and outriggers firmly against ground. Load ratings shown are for vehicles equipped with foam-filled or solid tires. Load includes weight of any rigging. 5,000 lbs. at 24" minimum capacity/fork (10,000 lbs./pair).

BOOM ANGLE: -5° – 70°

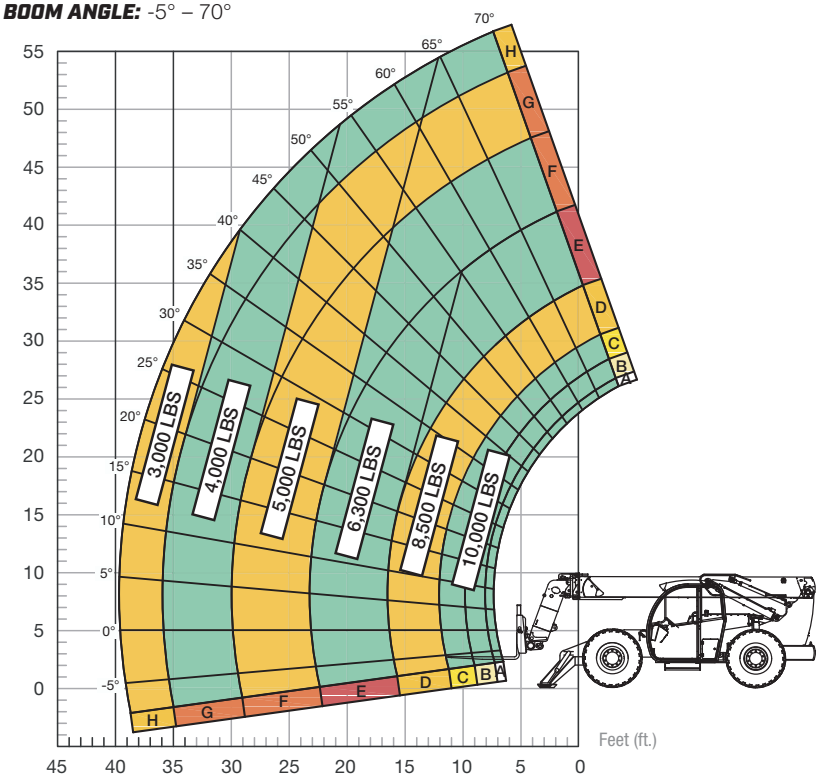

FIXED CARRIAGE: OUTRIGGERS DOWN | 24" LOAD CENTER